


VIEW OF TYPICAL AUTOMATION AND NAMES OF COMPONENTS

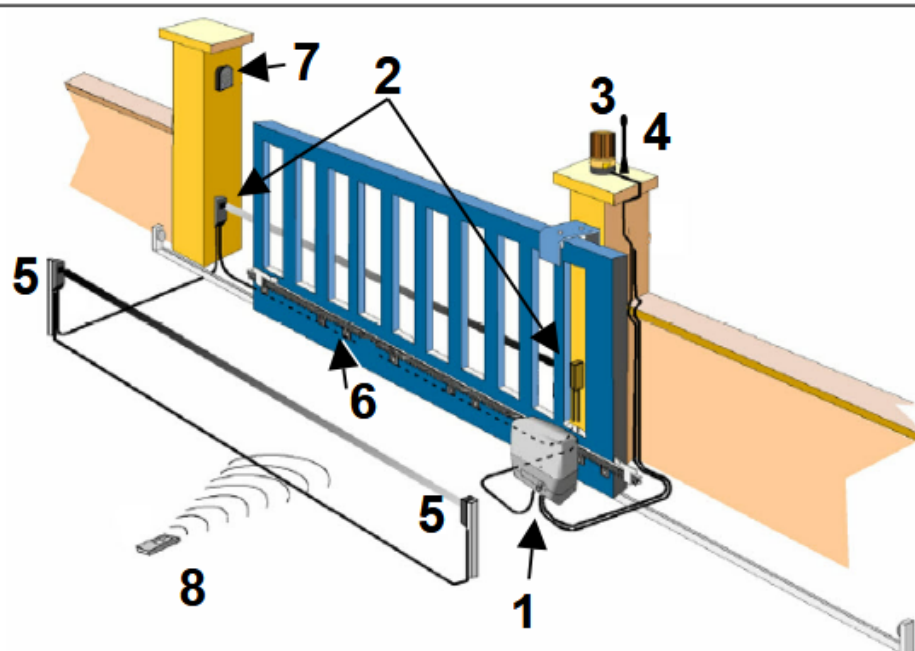


Optimal installation

- | | |
|------------------------------------|-----------------------|
| 1- Motor with on-board electronics | 5- Internal photocell |
| 2- External photocell | 6- Rack |
| 3- Flashing warning light | 7- Key-switch |
| 4- Antenna | 8- Remote control |

TECHNICAL DATA

Max. weight of gate	400 Kg
Motors power supply	230 Vac
Motor current input	1.3 A
Motor power	250 W
Motor RPM	1400
Condenser	10 μ F
Mechanical unlock for emergency manoeuvre	With key
Working temperature	-20° C / +55° C
Weight	8 Kg
Protection rating	IP 44
Opening time	10 mt min
Limit switch	Electromechanical

DIMENSIONS

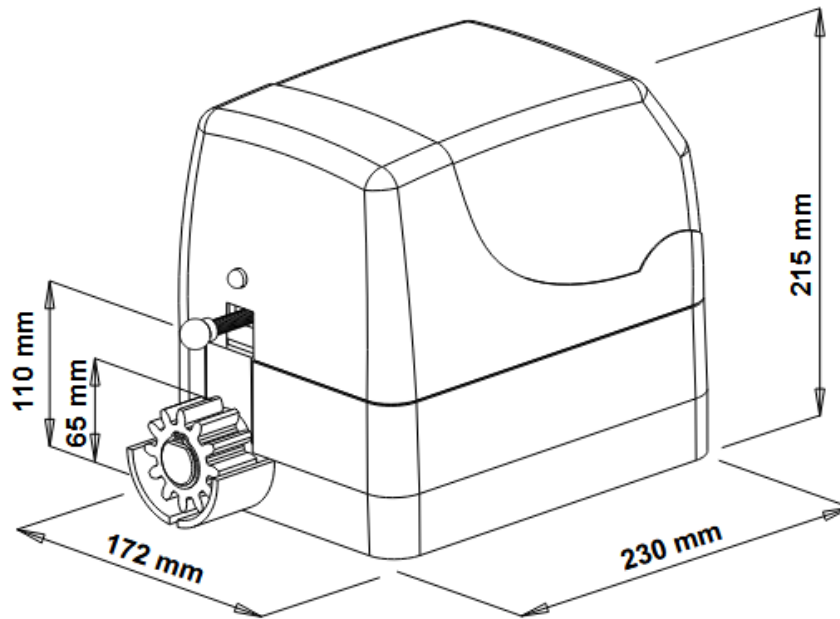

TYPICAL CONNECTION AND CABLE SECTION

